


8K and 27K Rod and Piston Seals

Pressure sensitive, stacked set for hydraulic sealing

The Chesterton® 8K and 27K are single acting, stacked V-ring sets with a positive rake design to provide optimum operating performance. Unlike conventional stacked sets, these designs make contact through the center to ensure even loading, longer sealing life, and with minimal gland pressure. These sets are available in split or solid designs and provide excellent performance in closed-cavity hydraulic applications.

The 8K is a compression molded stacked set that utilizes tooling to create a final product. The 27K is manufactured using a machining process which allows the flexibility to create any size based on equipment dimensions and eliminates tooling cost for new sizes. Each set incorporates a male and female adapter to align and support the sealer rings.


Additional profiles have been derived from the original 8K design to address specific needs and applications in the market. These include designs for excessive clearances and deep stuffing boxes.

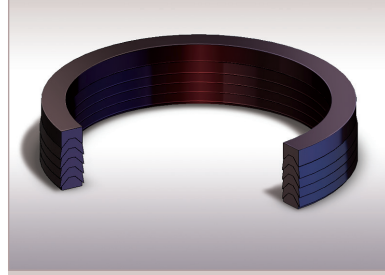


- *Even stack load enables faster cycling with less friction and optimum sealing force*
- *Flared, pressure sensitive lip; sealing forces are reactive to pressure*
- *Delivered as split components for ease of installation*
- *Sizes made to accommodate international standards including ISO and DIN*

SPECIFICATIONS

Material (designation)	Size Range mm (inch)	Temperature °C (°F)	Pressure bar (psi)	Speed m/s (ft/min)
AWC700 (FKM)	6 to 152 (1/4 to 6)	-30 to 200 (-20 to 400)	345 (5,000)	1.5 (300)
AWC800 (EU)	6 to 1320 (1/4 to 52)	-50 to 85 (-60 to 185)	1035 (15,000)	0.9 (185)
AWC805 (EU)	6 to 1320 (1/4 to 52)	-50 to 85 (-60 to 185)	1035 (15,000)	0.5 (100)
AWC825 (EU)	6 to 1400 (1/4 to 55)	-40 to 85 (-40 to 185)	517 (7,500)	0.5 (100)
AWC830 (EU)	6 to 254 (1/4 to 10)	-35 to 75 (-30 to 165)	520 (7,500)	0.9 (185)
AWC860 (EU)	6 to 508 (1/4 to 20)	-50 to 120 (-60 to 250)	1035 (15,000)	1.25 (250)

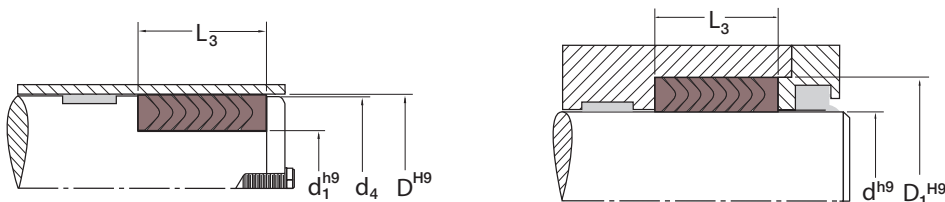

PRODUCT PROFILES:

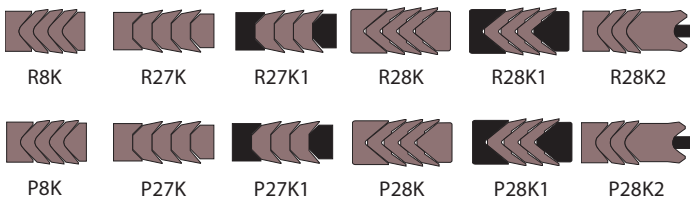

To place an order:

Product profile: _____
 Material: _____
 Piston groove diameter (d_1): _____
 Cylinder bore diameter (D): _____
 Groove height (L): _____

To place an order:

Product profile: _____
 Material: _____
 Rod or ram diameter (d): _____
 Bore diameter (D_1): _____
 Working height (L_3): _____



GLOBAL SOLUTIONS, LOCAL SERVICE

Since its founding in 1884, A.W. Chesterton Company has successfully met the critical needs of its diverse customer base. Today, as always, customers count on Chesterton solutions to increase equipment reliability, optimize energy consumption, and provide local technical support and service wherever they are in the world.

Chesterton's global capabilities include:

- Servicing plants in over 100 countries
- Global manufacturing operations
- More than 500 Service Centers and Sales Offices worldwide
- Over 1200 trained local Service Specialists and Technicians

Visit our website at
www.chesterton.com

Chesterton ISO certificates available on www.chesterton.com/corporate/iso

Technical data reflects results of laboratory tests and is intended to indicate general characteristics only.
A.W. CHESTERTON COMPANY DISCLAIMS ALL WARRANTIES EXPRESSED, OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE OR USE. LIABILITY, IF ANY, IS LIMITED TO PRODUCT REPLACEMENT ONLY.
ANY IMAGES CONTAINED HEREIN ARE FOR GENERAL ILLUSTRATIVE OR AESTHETIC PURPOSES ONLY AND ARE NOT INTENDED TO CONVEY ANY INSTRUCTIONAL, SAFETY, HANDLING OR USAGE INFORMATION OR ADVICE RESPECTING ANY PRODUCT OR EQUIPMENT. PLEASE REFER TO RELEVANT MATERIAL SAFETY DATA SHEETS, PRODUCT DATA SHEETS AND/OR PRODUCT LABELS FOR SAFE USE, STORAGE, HANDLING AND DISPOSAL OF PRODUCTS OR CONSULT WITH YOUR LOCAL CHESTERTON REPRESENTATIVE.



860 Salem Street
Groveland, MA 01834 USA
Telephone: 781-438-7000
Fax: 978-469-6528
www.chesterton.com

© 2016 A.W. Chesterton Company. All rights reserved.
® Registered trademark owned and licensed by
A.W. Chesterton Company in USA and other countries.

DISTRIBUTED BY:



Area Tecnica Srl
Strada Banchette 3/1 - 10090 Rosta (TO)
Tel. (+39) 011 4035367 - Fax (+39) 011 4113564
info@areatecnica.it - www.areatecnica.it

FORM NO. EN75558-8K27K

PRINTED IN USA 7/16