

9K Anti-Extrusion Rings

Combat extrusion of hydraulic seals


Chesterton® 9K anti-extrusion rings, often referred to as back-up rings, are designed to prevent seals or O-rings from extruding into equipment clearances while under pressure. Each ring is individually manufactured and provides excellent performance, as a supporting element, to both piston, rod and face seals that are generally found in static or dynamic applications.

Chesterton® 9K anti-extrusion rings, utilize a machining process to create a final product which enables all sizes to be made to equipment dimensions. These anti-extrusion rings are available in various extrusion-resistant materials and are located on the back-side or low pressure side of the sealing element they are supporting. Anti-extrusion rings are available in many materials and custom profiles including rectangular, contoured, continuous or split designs.




- Prevent extrusion of sealing element into equipment clearances, improve MTBR
- Static and dynamic applications, plant-wide usage
- Machining process, allows the flexibility to create any size
- Available in various profiles and materials
- Back up rings, prevent seal extrusion

SPECIFICATIONS		
Material (designation)	Size Range mm (inch)	Temperature °C (°F)
AWC800 (EU)	6 to 1320 (1/4 to 52)	- 50 to 85 (- 60 to 185)
AWC520 (Virgin PTFE)	6 to 1320 (1/4 to 52)	Cryogenic to 230 (Cryogenic to 450)
AWC650 (Acetal)	6 to 381 (1/4 to 15)	- 30 to 90 (- 20 to 200)
AWC665 (Nylon with MoS ₂)	>381 to 915 (>15 to 36)	- 40 to 105 (- 40 to 212)

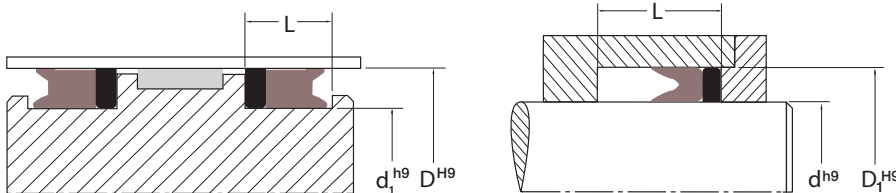

PRODUCT PROFILES:

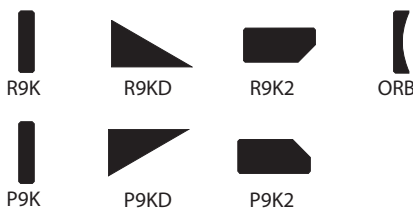

To place an order:
 Product profile: _____
 Material: _____
 Rod or ram diameter (d): _____
 Bore diameter (D₁): _____
 Groove height (L): _____

To place an order:
 Product profile: _____
 Material: _____
 Piston groove diameter (d₁): _____
 Cylinder bore diameter (D): _____
 Groove height (L): _____



GLOBAL SOLUTIONS, LOCAL SERVICE

Since its founding in 1884, A.W. Chesterton Company has successfully met the critical needs of its diverse customer base. Today, as always, customers count on Chesterton solutions to increase equipment reliability, optimize energy consumption, and provide local technical support and service wherever they are in the world.

Chesterton's global capabilities include:

- Servicing plants in over 100 countries
- Global manufacturing operations
- More than 500 Service Centers and Sales Offices worldwide
- Over 1200 trained local Service Specialists and Technicians

Visit our website at
www.chesterton.com

Chesterton ISO certificates available on www.chesterton.com/corporate/iso

Technical data reflects results of laboratory tests and is intended to indicate general characteristics only.
A.W. CHESTERTON COMPANY DISCLAIMS ALL WARRANTIES EXPRESSED, OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE OR USE. LIABILITY, IF ANY, IS LIMITED TO PRODUCT REPLACEMENT ONLY.
ANY IMAGES CONTAINED HEREIN ARE FOR GENERAL ILLUSTRATIVE OR AESTHETIC PURPOSES ONLY AND ARE NOT INTENDED TO CONVEY ANY INSTRUCTIONAL, SAFETY, HANDLING OR USAGE INFORMATION OR ADVICE RESPECTING ANY PRODUCT OR EQUIPMENT. PLEASE REFER TO RELEVANT MATERIAL SAFETY DATA SHEETS, PRODUCT DATA SHEETS AND/OR PRODUCT LABELS FOR SAFE USE, STORAGE, HANDLING AND DISPOSAL OF PRODUCTS OR CONSULT WITH YOUR LOCAL CHESTERTON REPRESENTATIVE.



860 Salem Street
Groveland, MA 01834 USA
Telephone: 781-438-7000
Fax: 978-469-6528
www.chesterton.com

© A.W. Chesterton Company, 2009. All rights reserved.
® Registered trademark owned and licensed by
A.W. Chesterton Company in USA and other countries.

DISTRIBUTED BY:



Area Tecnica Srl
Strada Banchette 3/1 - 10090 Rosta (TO)
Tel. (+39) 011 4035367 - Fax (+39) 011 4113564
info@areatecnica.it - www.areatecnica.it

FORM NO. EN22239

PRINTED IN USA 7/09