


CCS Rod and Piston Seals

Dual component system for bi-directional sealing

Chesterton® Custom Cap Seals (CCS) are custom manufactured, rod or piston mounted, bi-directional seals made from second generation PTFE. The second generation PTFE offers improved performance over conventional materials. Each seal is individually manufactured and provides excellent performance in single groove, double acting, hydraulic applications.

Each cap seal is made from our machining process which eliminates the need for tooling costs associated with new sizes. This cap seal design is comprised of a two-piece, sealing system that uses an elastomeric cap with an O-ring to create a very effective seal. The cap is used as the dynamic sealing element while the O-ring energizes the cap and creates a static seal.

Additional designs were developed to meet specific application and equipment needs. Both components are available in a range of engineered materials to best suit the specific operating requirements.

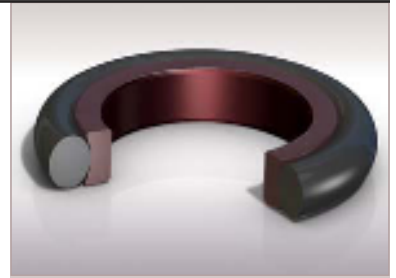


- *Second generation PTFE offers improved performance*
- *Compression seal design increases sealing force with system pressure*
- *Proven seal design provides predictable performance*
- *Sizes made to accommodate international standards including ISO and DIN*

SPECIFICATIONS


Cap Material (designation)	Size Range mm (inch)	Temperature °C (°F)	Pressure bar (psi)	Speed m/s (ft/min) Rotary/Reciprocating
*AWC800 (EU)		-35 to 85 (-30 to 185)		0.5 (100)/0.85 (185)
*AWC860 (EU)		-35 to 120 (-30 to 250)		0.75 (150)/1.25 (250)
**AWC220 (8% glass filled PTFE)	19 to 380 (3/4 to 15)	-35 to 120 (-30 to 250)	345 (5,000)	5.0 (960)/15 (3,000)
**AWC440 (10% carbon filled PTFE)		-35 to 120 (-30 to 250)		5.0 (960)/15 (3,000)
**AWC550 (60% bronze filled PTFE)		-35 to 120 (-30 to 250)		5.0 (960)/15 (3,000)

*Buna energizer

**FKM energizer

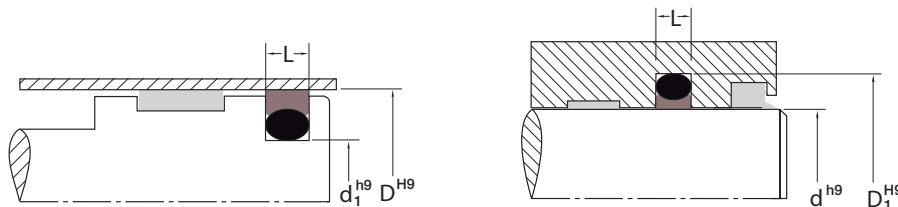

PRODUCT PROFILES:

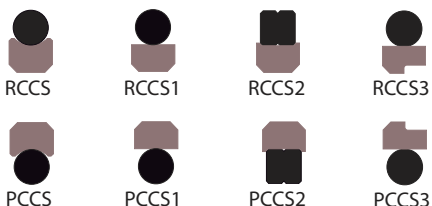

To place an order:

Product profile: _____
 Material: _____
 Rod or ram diameter (d): _____
 Bore diameter (D₁): _____
 Groove height (L): _____

To place an order:

Product profile: _____
 Material: _____
 Piston groove diameter (d₁): _____
 Cylinder bore diameter (D): _____
 Groove height (L): _____



GLOBAL SOLUTIONS, LOCAL SERVICE

Since its founding in 1884, A.W. Chesterton Company has successfully met the critical needs of its diverse customer base. Today, as always, customers count on Chesterton solutions to increase equipment reliability, optimize energy consumption, and provide local technical support and service wherever they are in the world.

Chesterton's global capabilities include:

- Servicing plants in over 100 countries
- Global manufacturing operations
- More than 500 Service Centers and Sales Offices worldwide
- Over 1200 trained local Service Specialists and Technicians

Visit our website at
www.chesterton.com

Chesterton ISO certificates available on www.chesterton.com/corporate/iso

Technical data reflects results of laboratory tests and is intended to indicate general characteristics only.
A.W. CHESTERTON COMPANY DISCLAIMS ALL WARRANTIES EXPRESSED, OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE OR USE. LIABILITY, IF ANY, IS LIMITED TO PRODUCT REPLACEMENT ONLY.
ANY IMAGES CONTAINED HEREIN ARE FOR GENERAL ILLUSTRATIVE OR AESTHETIC PURPOSES ONLY AND ARE NOT INTENDED TO CONVEY ANY INSTRUCTIONAL, SAFETY, HANDLING OR USAGE INFORMATION OR ADVICE RESPECTING ANY PRODUCT OR EQUIPMENT. PLEASE REFER TO RELEVANT MATERIAL SAFETY DATA SHEETS, PRODUCT DATA SHEETS AND/OR PRODUCT LABELS FOR SAFE USE, STORAGE, HANDLING AND DISPOSAL OF PRODUCTS OR CONSULT WITH YOUR LOCAL CHESTERTON REPRESENTATIVE.



860 Salem Street
Groveland, MA 01834 USA
Telephone: 781-438-7000
Fax: 978-469-6528
www.chesterton.com

© A.W. Chesterton Company, 2009. All rights reserved.
® Registered trademark owned and licensed by
A.W. Chesterton Company in USA and other countries.

DISTRIBUTED BY:



Area Tecnica Srl
Strada Banchette 3/1 - 10090 Rosta (TO)
Tel. (+39) 011 4035367 - Fax (+39) 011 4113564
info@areatecnica.it - www.areatecnica.it

FORM NO. EN22259

PRINTED IN USA 7/09